



**MUST BE ABOVE 65 DEGREES TO INSTALL AND
NOT WINDY**





Your graphic will
come rolled up

Lay the graphics out
to allow to flatten
naturally


**If you wraps are damaged, you can still install them. Vinyl
is very resilient and will conform even with wrinkles and
folds.**

Surface must be clean and dry.

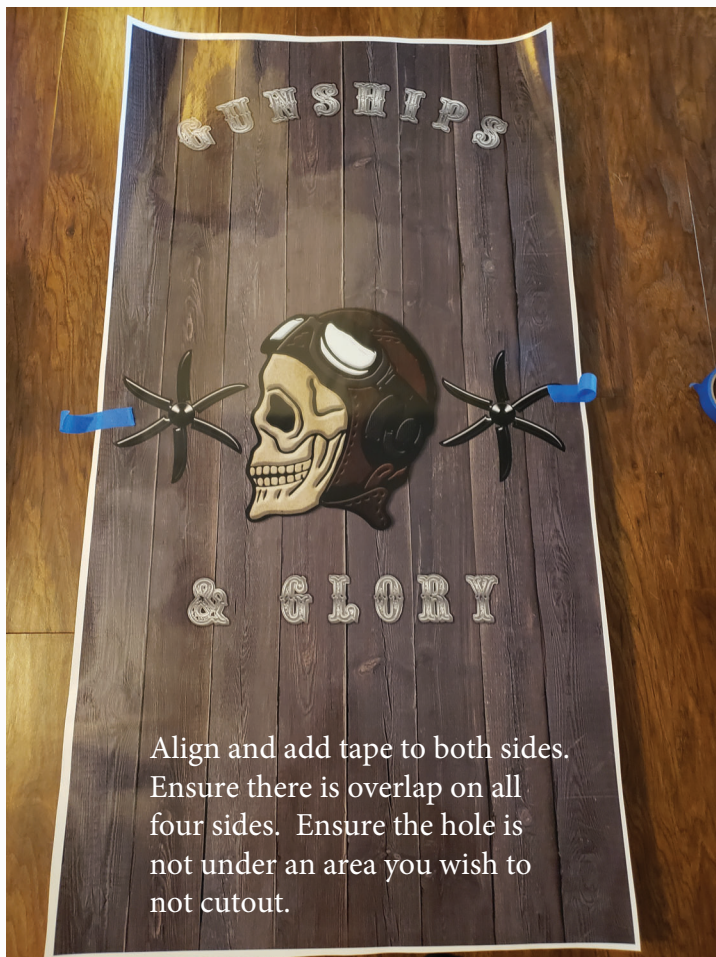

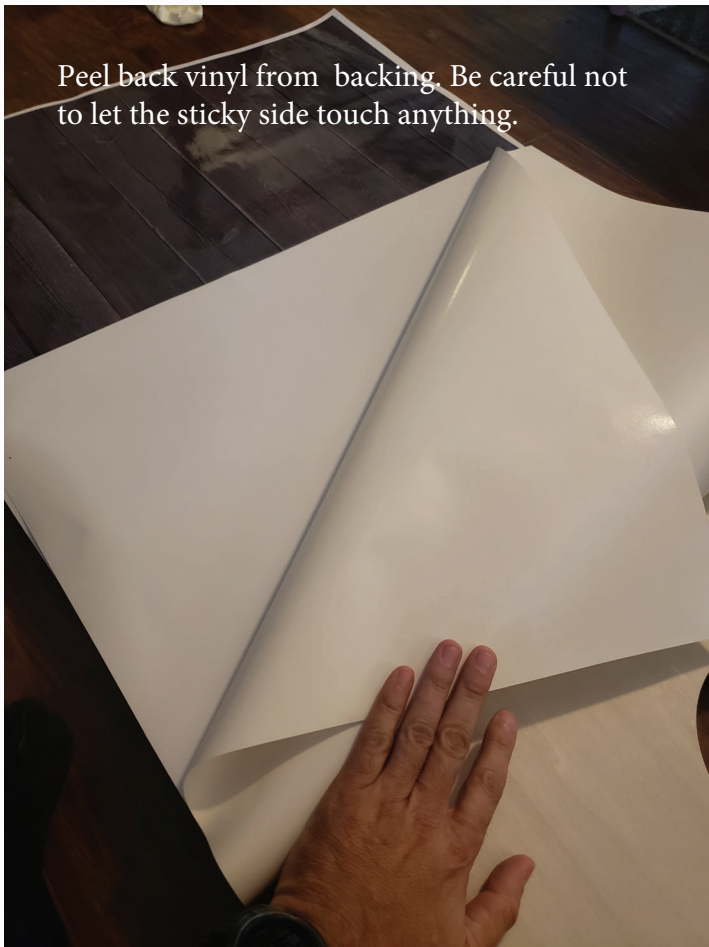

Peel back vinyl from backing. Be careful not to let the sticky side touch anything.

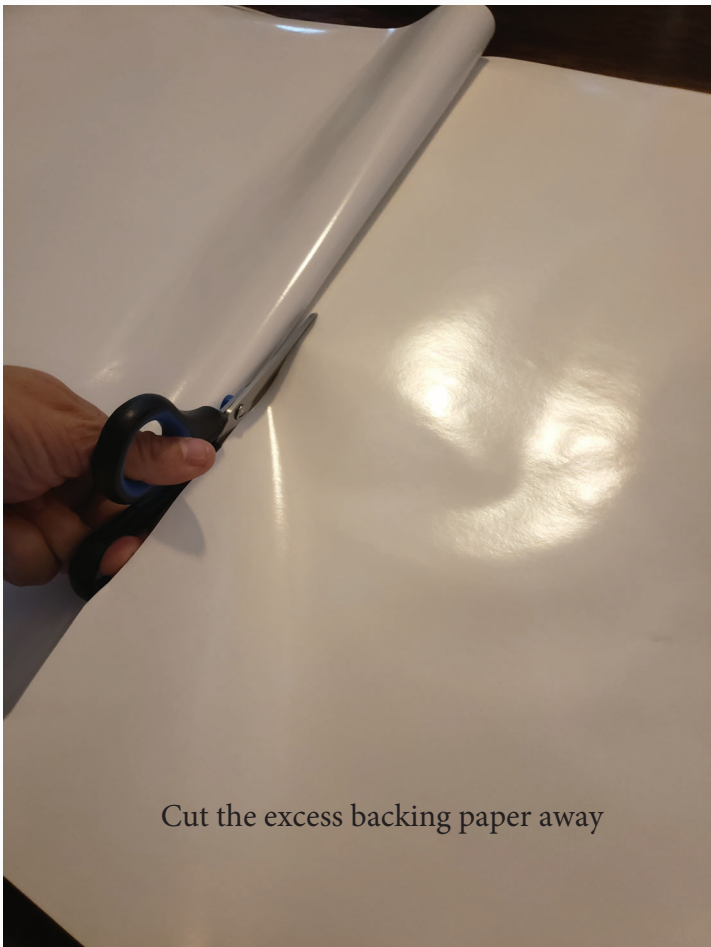


Cut the excess backing paper away



Holding the vinyl up and away from the surface use the squeegee felt side to push down the vinyl starting from the middle and working up and out. If a wrinkle starts, pull up and start again.



Remove taped sides

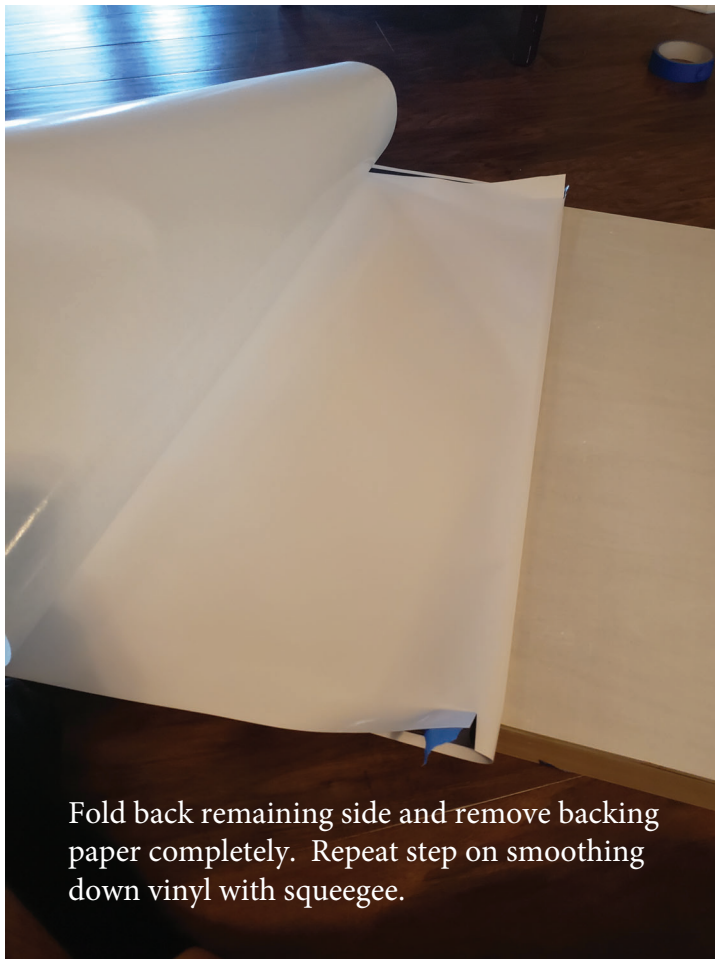

Fold back remaining side and remove backing paper completely. Repeat step on smoothing down vinyl with squeegee.



Trim edges using knife provided



Trim out hole

