



**MUST BE ABOVE 65 DEGREES TO INSTALL AND
NOT WINDY**

MINIMUM 2 PEOPLE REQUIRED










PULL GRAPHIC AND BACKING PAPER AWAY FROM GLASS WHILE EXPOSING MORE OF THE STICKY SIDE OF THE DECAL



SQUEEGEE DOWN THE VINYL WHILE PULLING THE VINYL AWAY FROM THE GLASS.

CONTINUE THIS UNTIL THE BACKING PAPER IS REMOVED.

IF YOU GET A WRINKLE SIMPLY PULL THE VINYL AWAY FROM THE GLASS AND START AGAIN, IT IS LOW TAC.

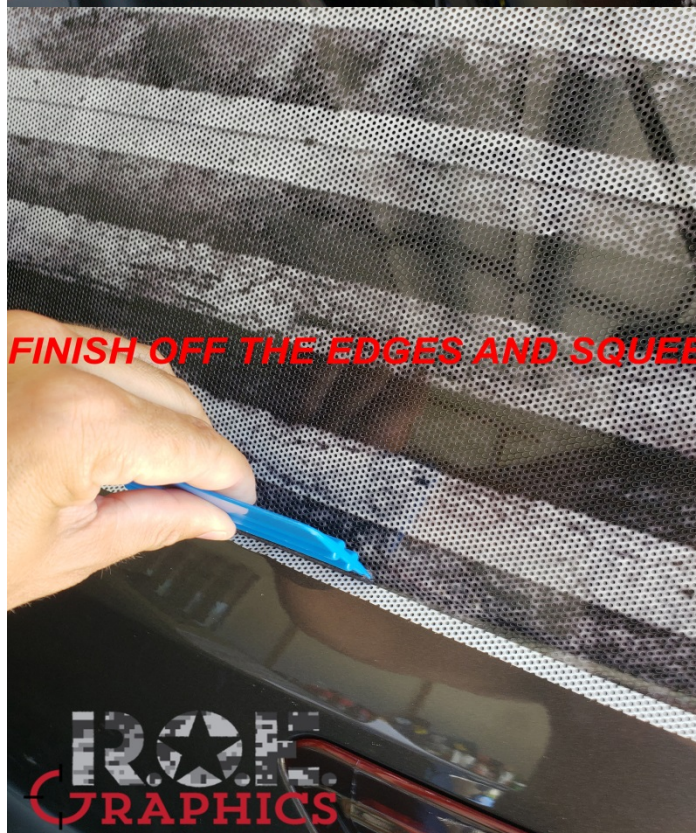

FINISH OFF THE EDGES AND SQUEEGEE OUT ANY AIR BUBBLES





**CONTACT US WITH ANY QUESTIONS OR
CONCERNS THROUGH THE CONTACT FORM
ON WEBSITE OR
ROE-GRAPHICS@YAHOO.COM**